




Product Service

# CERTIFICATE

No. Z2 103216 0010 Rev.00

**Holder of Certificate:** **DualSun SAS**  
2 rue Marc Donadille  
13013 Marseille  
FRANCE

## Certification Mark:

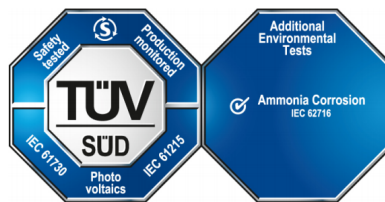

**Product:** **Crystalline Silicon Terrestrial Photovoltaic (PV) Modules**  
**Mono-crystalline Silicon Photovoltaic Module**

The product was tested on a voluntary basis and complies with the essential requirements. The certification mark shown above can be affixed on the product. It is not permitted to alter the certification mark in any way. In addition, the certification holder must not transfer the certificate to third parties. This certificate is valid until the listed date, unless it is cancelled earlier. All applicable requirements of the testing and certification regulations of TÜV SÜD Group have to be complied. For details see: [www.tuvsud.com/ps-cert](http://www.tuvsud.com/ps-cert)

**Test report no.:** 701262203201-00

**Valid until:** 2027-05-12

**Date,** 2022-06-05

( Zhulin Zhang )



# CERTIFICATE

No. Z2 103216 0010 Rev.00

## Model(s):

DSxxx-144M6-01-V, xxx=415-455, in steps of 5  
 DSxxx-120M6-01-V, xxx=345-380, in steps of 5  
 DSxxx-144M6-02-V, xxx=415-455, in steps of 5  
 DSxxx-120M6-02-V, xxx=345-380, in steps of 5  
 DSxxx-60G1-01-V, xxx=315-330, in steps of 5  
 DSxxx-60G1-02-V, xxx=315-330, in steps of 5  
 DSxxx-120G1-01-V, xxx=320-350, in steps of 5  
 DSxxx-120G1-02-V, xxx=320-350, in steps of 5  
 DSxxx-72G1-01-V, xxx=385-395, in steps of 5  
 DSxxx-72G1-02-V, xxx=385-395, in steps of 5  
 DSxxx-144G1-01-V, xxx=380-420, in steps of 5  
 DSxxx-144G1-02-V, xxx=380-420, in steps of 5  
 DSxxx-60M2-01-V, xxx=280-310, in steps of 5  
 DSxxx-120M2-01-V, xxx=280-320, in steps of 5  
 DSxxx-60M2-02-V, xxx=280-310, in steps of 5  
 DSxxx-120M2-02-V, xxx=280-320, in steps of 5  
 DSxxx-72M2-01-V, xxx=335-375, in steps of 5  
 DSxxx-72M2-02-V, xxx=335-375, in steps of 5  
 DSxxx-144M2-01-V, xxx=340-385, in steps of 5  
 DSxxx-144M2-02-V, xxx=340-385, in steps of 5  
 DSxxx-144M10-01, xxx=535-555, in steps of 5  
 DSxxx-144M10-02, xxx=535-555, in steps of 5  
 DSxxx-132M10-01, xxx=480-505, in steps of 5  
 DSxxx-132M10-02, xxx=480-505, in steps of 5  
 DSxxx-120M10-01, xxx=445-460, in steps of 5  
 DSxxx-120M10-02, xxx=445-460, in steps of 5  
 DSxxx-108M10-01, xxx=380-415, in steps of 5  
 DSxxx-108M10-02, xxx=380-415, in steps of 5  
 DSxxx-132G12-01, xxx=650-660, in steps of 5  
 DSxxx-132G12-02, xxx=650-660, in steps of 5  
 DSxxx-120G12-01, xxx=590-600, in steps of 5  
 DSxxx-120G12-02, xxx=590-600, in steps of 5  
 xxx is standing for the rated output power at STC.

## Parameters:

Safety Class:	Class II
Max. System Voltage:	1500V DC
Construction:	Framed, with Junction box, cable and connectors.
Fire Safety Class:	Class C according to UL790

## Tested according to:

IEC 61215-1:2016  
 IEC 61215-1-1:2016  
 IEC 61215-2:2016  
 IEC 61730-1:2016  
 IEC 61730-2:2016  
 IEC 62716:2013