




Product Service

CERTIFICATE

No. Z2 103216 0009 Rev. 00

Holder of Certificate: **DualSun SAS**
2 rue Marc Donadille
13013 Marseille
FRANCE

Certification Mark:

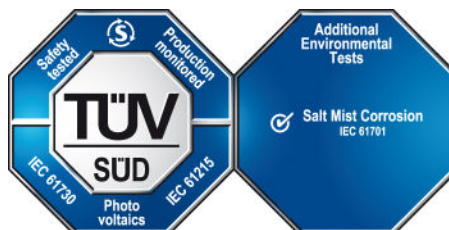

Product: **Crystalline Silicon Terrestrial Photovoltaic (PV) Modules**
Mono-crystalline Silicon Photovoltaic Module

The product was tested on a voluntary basis and complies with the essential requirements. The certification mark shown above can be affixed on the product. It is not permitted to alter the certification mark in any way. In addition, the certification holder must not transfer the certificate to third parties. This certificate is valid until the listed date, unless it is cancelled earlier. All applicable requirements of the testing and certification regulations of TÜV SÜD Group have to be complied. For details see: www.tuvsud.com/ps-cert

Test report no.: 701262108702-00

Valid until: 2027-01-16

Date, 2022-02-23

(David Bo)

CERTIFICATE

No. Z2 103216 0009 Rev. 00

Model(s):

DSxxx-144M6-01-V, xxx=415-455, in steps of 5
DSxxx-120M6-01-V, xxx=345-380, in steps of 5
DSxxx-144M6-02-V, xxx=415-455, in steps of 5
DSxxx-144M6-03-V, xxx=415-455, in steps of 5
DSxxx-120M6-02-V, xxx=345-380, in steps of 5
DSxxx-60G1-01-V, xxx=315-330, in steps of 5
DSxxx-60G1-02-V, xxx=315-330, in steps of 5
DSxxx-120G1-01-V, xxx=320-350, in steps of 5
DSxxx-120G1-02-V, xxx=320-350, in steps of 5
DSxxx-72G1-01-V, xxx=385-395, in steps of 5
DSxxx-72G1-02-V, xxx=385-395, in steps of 5
DSxxx-144G1-01-V, xxx=380-420, in steps of 5
DSxxx-144G1-02-V, xxx=380-420, in steps of 5
DSxxx-60M2-01-V, xxx=280-310, in steps of 5
DSxxx-120M2-01-V, xxx=280-320, in steps of 5
DSxxx-60M2-02-V, xxx=280-310, in steps of 5
DSxxx-120M2-02-V, xxx=280-320, in steps of 5
DSxxx-72M2-01-V, xxx=335-375, in steps of 5
DSxxx-72M2-02-V, xxx=335-375, in steps of 5
DSxxx-144M2-01-V, xxx=340-385, in steps of 5
DSxxx-144M2-02-V, xxx=340-385, in steps of 5
DSxxx-144M10-01, xxx=535-555, in steps of 5
DSxxx-144M10-02, xxx=535-555, in steps of 5
DSxxx-132M10-01, xxx=480-505, in steps of 5
DSxxx-132M10-02, xxx=480-505, in steps of 5
DSxxx-120M10-01, xxx=445-460, in steps of 5
DSxxx-120M10-02, xxx=445-460, in steps of 5
DSxxx-108M10-01, xxx=380-415, in steps of 5
DSxxx-108M10-02, xxx=380-415, in steps of 5
DSxxx-132G12-01, xxx=650-660, in steps of 5
DSxxx-132G12-02, xxx=650-660, in steps of 5
DSxxx-120G12-01, xxx=590-600, in steps of 5
DSxxx-120G12-02, xxx=590-600, in steps of 5
DSxxx-120G12-03, xxx=590-600, in steps of 5
xxx is standing for the rated output power at STC.

Parameters:

Test method of Salt mist test:	Test method 6
Safety Class:	Class II
Max. System Voltage:	1500V DC
Construction:	Framed, with Junction box, cable and connector.
Fire Safety Class:	Class C according to UL790

Tested according to:

IEC 61215-1:2016
IEC 61215-1-1:2016
IEC 61215-2:2016
IEC 61730-1:2016
IEC 61730-2:2016
IEC 61701:2020